


20FT UN Portable T11 25CBM

One way used

20 ft. UN tank container iht. T11 som kan transporteres på båt, tog, trailer og i cargo fly. T11 tankene er godkjent iht.de høyeste standardene innen internasjonal transport for sikkerhet. Kan lagre div. vesker som krever en temperatur fra -40 til +65 med en arb. trykk på 4 bar. Container rammen har en ekstrem sterk struktur og tåler over 180 tonn på containerens hjørner, 25 000 liter innvendig kapasitet. Dette gjør at containeren trenger kun og stå på 4 punkter. REBLOCK® bygger også om containere til alle formål.

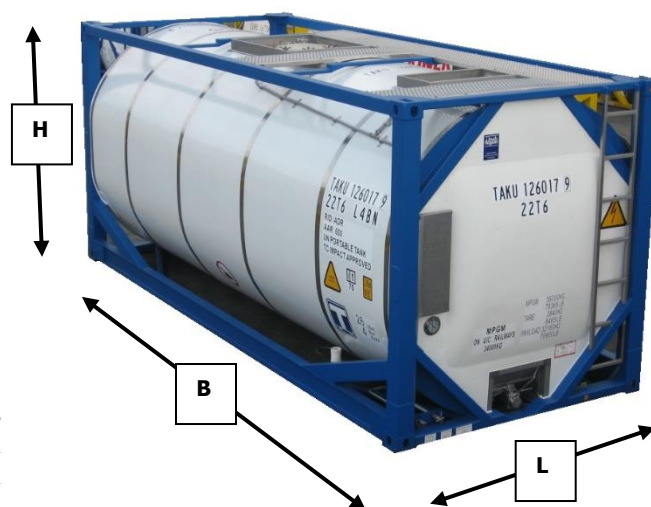

TEKNISK

Produkt nr.:	
Utvendig: HxBxL	2591/2438/6058mm
Arb. Trykk:	4 bar
Arb. Temperature:	-40 til +65 grader
Kapasitet tank:	25 000 L
Egenvekt:	3680kg
Totalvekt	34 000kg
Truklommer: HxB senter/senter	N/A
Ventiler:	ja
Løfteører:	8 stk
Stabling:	7 stk
Låsemulighet:	Galvaniserte stag
Sertifikater:	ASME,IMDG T11,US Dot CFR 49, ADR, RID, UIC, AAR, CSC, TIR ISO,



Standard Fittings:	
Manlid	500mm (20") diameter, 8 point fixing, 14mm x 12mm seal.
Calibration	Volumetric stainless steel chart.
Airline / Vapour	40mm (1½") ball valve Fort Vale, outlet 1½" BSP, stainless steel screw cap.
Relief Valve	80mm (3") DN65 flanged Fort Vale Mk111 super maxi high flow, operating pressure 4.4 bar, weld-in flange plugged provision for second flanged valve.
Top Outlet	Blanked weld-in flange drilled 6 M12 holes @ 168 pcd, provision for optional fitting of 80mm (3") stainless steel butterfly valve. DN80, ASA 150 bolted blank flange outlet, 80mm (3") removable full-length syphon tube.
Bottom Discharge	80mm(3") Fort Vale highlift foot valve and FV clamped 80mm (3") butterfly valve. Outlet 3" BSP screw thread and cap.
Remote Closure	Bottom valve closure device fitted together with provision of fusible link.
Gaskets & Seals	Parts in contact with cargo, PTFE/Teflon.
Steam Heating	7.5m ² (80 ²) effective surface area, eight external steam ducts, ¼" BSP screw inlet / outlet and cap. Maximum pressure 4 bars. Tank max temperature 130°C.
Insulation	50mm (2") total comprising 50mm mineral wool 55 kg/m ³ (CFC free) semi rigid stiffened at top and covered by 0.8mm grade 5251 H44 aluminium pre-painted cladding, estimated thermal value 37 Kcal/hr at 30°C.
Compartment	Open stainless steel spill compartments with provision for optional lids.
Document Holder / Earth	Fitted rear end, suitable for shipping papers, MSDS etc. Earth located at rear.
Data Plate / Markings	Data Plate / Markings.
Walkway	Aluminium Q grating with access to top fittings, extending to front end. Provision for optional handrail. Ladder at rear rhs.
Temperature Gauge	80mm dia dual scale -20°C to 200°C / 0 to 400°F.

**Forbehold om endringer eller feil info.
Endelig info. avklares i ordre.

Telefon: 63 80 90 80
E-post: post@reblock.no
Adresse: Gamleveien 2, 1476 Lørenskog